



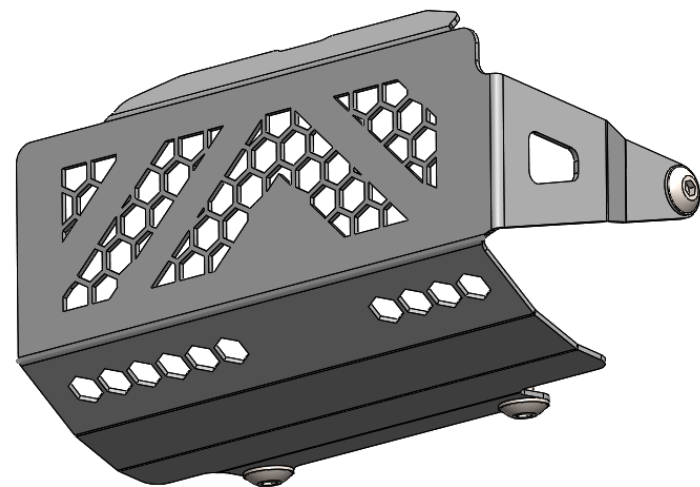

**STAINLESS STEEL TRAIL FRONT
ENGINE GUARD**
Ref.: 2CP0900A85

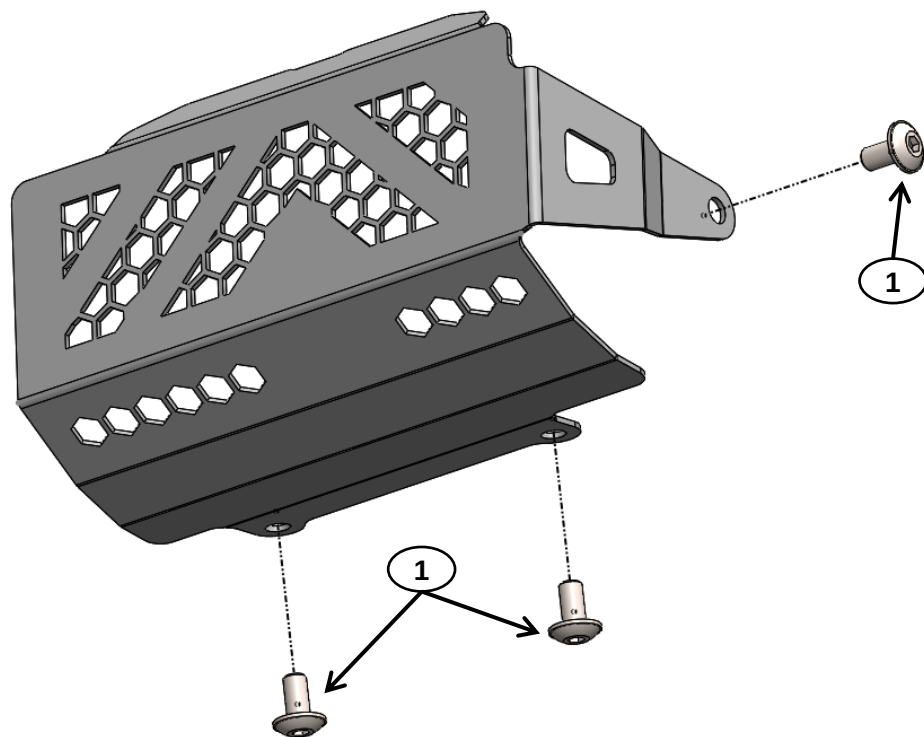

4 mm

N.m (TORQUE)		
	AÇO / STEEL	INOX
M4	2,7	0,8
M5	5,5	1,7
M6	9,7	3
M8	23	7,9
M10	47	14

1	Paraf. Cabeça Redonda Sext. Int. c. FA / Round Head Screw With Washer False	M6x12 - ISO 7380	3
ITEM Nº:	COMPONENTE (COMPONENT):	DESCRIÇÃO (DESCRIPTION):	QUANT.:
ACESSÓRIOS (ACCESSORIES)			

STAINLESS STEEL TRAIL FRONT ENGINE GUARD



English:

- Remove the original engine guard and original front clamp to mount the guard. Attach the new protection parts using the images shown to ensure the correct position of guard and bolts. Add a little medium strength loctite and torque all bolts to the correct value.

Français:

- Démonter la protection moteur d'origine et le fixation avant d'origine pour monter la protection. Monter la protection en utilisant les images présentées pour assurer la position correcte de la protection et des boulons. Ajouter un peu de loctite sur les vis et torque toutes les vis avec le bonne valeur.

Português:

- Desmontar proteção de motor de origem e fixação frontal de origem para montar a proteção. Montar as novas peças de proteção usando as imagens mostradas para garantir a posição correta da proteção e dos parafusos. Adicionar um pouco de cola nos parafusos e apertar todos os parafusos com o valor correto de torque.